



HVTECK SPECIFICATIONS

HVTECK AL 3/C 90TRXLPE TS PVC AIA PVC 5KV 100% CSA

PRODUCT HIGHLIGHTS

Southwire's 5KV HVTECK is a CSA armoured cable for industrial and commercial medium voltage applications. Rated FT4, -40°C, Hazardous Locations (HL) and 105°C for use in harsh Canadian environments. For installation in cable trays, duct banks, direct burial, troughs, continuous rigid cable supports and concrete encaseable.

CONSTRUCTION

Conductor

- Class B - compact stranded -8000 Series Aluminum -ACM

Options

- Class B compact stranded copper
- Class B compressed stranded copper
- Strand blocking technology
- Tinning on copper conductors

Conductor Shield

- Extruded semi-conducting thermosetting polymeric layer

Insulation

- TR-XLPE - (Tree Retardent Cross Linked Polyethylene)
- Thickness: 0.09 inches (2.29mm) - nominal
- Insulation level: 100% - grounded system
- 105°C rated

Insulation Shield

- Extruded Semi-conducting thermosetting polymeric layer
- CSA 68.10 - Shield Removal/termination requirements are printed

on the surface

- Phase identification as per ICEA Method 3, using printed circuit numbers
- Meets requirement of ICEA but built to CSA standards

Copper Tape Shield

- Helically wrapped 5 mil copper tape with 25% overlap

Bonding Conductor

- Class B compressed stranded bare copper
- in accordance with ASTM B3 and B8

Fillers

- Non-wicking, non-hygroscopic

Inner Jacket

- Black PVC
- Thickness:
 - No.2 AWG to No.2/0 AWG = 0.08 inches (2.03mm)
 - No.3/0 AWG to 500 kcmil = 0.11 inches (2.79mm)
 - 750 kcmil = 0.14 inches (3.56mm)

Armour

- Aluminum Interlocked Armour (AIA)
- Optional Galvanized Steel Interlocked Armour (GSIA)

Overall Jacket

- Orange PVC (optional colours available)
- Nominal Thickness:
 - No.2 AWG to No.4/0 AWG = 0.06 inches (1.52mm)
 - 250 kcmil to 500 kcmil = 0.075 inches (1.91mm)
 - 750 kcmil = 0.085 inches (2.16mm)

Typical Print Legend

- (CSA) SOUTHWIRE (NESC) #P# 3/C [#AWG or #kcmil] CPT AL 90 TRXLPE AIA 5KV 100% INS LEVEL 25% TS SUN RES 105° FT4 HL (-40°C) LTGG RoHS YEAR [SEQUENTIAL METER MARKS]

TABLE 1 - WEIGHTS & MEASUREMENTS

HVTECK Product Code	Conductor Size *		Conductor Diameter		Diameter Over Insulation		Diameter Over Insulation Shield		Bonding Cond. Size	Diameter Over Inner Jacket		Diameter Over Armour		Approx. Overall Diameter		Minimum Bend Radius		Approx. Weight of Cable		Max. Reel Weight (reel and cable) **		Max. Reel Diameter / Width **		Max. Length of Cable on Reel **	
	AWG or Kcmil	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	lb / 1000ft	kg/km	lbs	kg	inches	m	feet	m		
AL90C95-002	2(7)	0.268	6.8	0.478	12.1	0.558	14.2	8	1.408	35.8	1.728	43.9	1.848	47.0	12.9	329	1358	2020	8130	3688	104/56.5	2.64/1.44	5000	1524	
AL90C95-001	1(19)	0.299	7.6	0.509	12.9	0.589	15.0	6	1.475	37.5	1.795	45.6	1.915	48.7	13.4	341	1495	2225	9029	4096	108/70.5	2.74/1.79	5000	1524	
AL90C95-010	1/0(19)	0.336	8.5	0.546	13.9	0.626	15.9	6	1.555	39.5	1.885	47.9	2.005	50.9	14.0	357	1697	2525	10039	4554	108/70.5	2.74/1.79	5000	1524	
AL90C95-020	2/0(19)	0.376	9.6	0.586	14.9	0.666	16.9	6	1.642	41.7	1.972	50.1	2.092	53.1	14.6	372	1854	2758	10545	4783	108/70.5	2.74/1.79	4850	1478	
AL90C95-030	3/0(19)	0.423	10.7	0.633	16.1	0.713	18.1	6	1.803	45.8	2.133	54.2	2.253	57.2	15.8	401	2166	3223	10977	4979	108/70.5	2.74/1.79	4350	1326	
AL90C95-040	4/0(19)	0.475	12.1	0.685	17.4	0.765	19.4	6	1.916	48.7	2.246	57.0	2.366	60.1	16.6	421	2399	3570	10430	4731	108/70.5	2.74/1.79	3700	1128	
AL90C95-250	250(37)	0.520	13.2	0.740	18.8	0.820	20.8	4	2.034	51.7	2.364	60.1	2.514	63.9	17.6	447	2834	4217	10198	4626	108/70.5	2.74/1.79	3050	930	
AL90C95-350	350(37)	0.616	15.6	0.836	21.2	0.916	23.3	4	2.242	56.9	2.572	65.3	2.722	69.1	19.1	484	3332	4959	10885	4937	108/70.5	2.74/1.79	2800	853	
AL90C95-500	500(37)	0.736	18.7	0.956	24.3	1.036	26.3	3	2.501	63.5	2.831	71.9	2.981	75.7	20.9	530	4059	6040	10485	4756	108/70.5	2.74/1.79	2200	671	
AL90C95-750	750(61)	0.908	23.1	1.138	28.9	1.218	30.9	2	2.954	75.0	3.284	83.4	3.454	87.7	24.2	614	5495	8177	9797	4444	108/70.5	2.74/1.79	1500	457	

NOTE: These are minimum average dimensions as per CSA Standards.

* Other conductor sizes and outer jacket colours are available upon request. (#s in brackets represent # of strands / conductor)

** Longer maximum lengths may be possible. Standard sizes and lengths may be supplied. Reel sizes are not guaranteed. The factory reserves the right to make changes as necessary to optimize manufacturing requirements.



HVTECK SPECIFICATIONS

HVTECK AL 3/C 90TRXLPE TS PVC AIA PVC 5KV 100% CSA

DESIGN

Qualification Standards

- CSA C68.10 - Shielded Power Cables for Commercial and Industrial Applications - 5 to 46 KV
- CSA C68.3 - Shielded & Concentric Neutral Power Cable - 5 to 46 KV
- CSA C22.2 No. 174 - Cables in Hazardous Locations
- ICEA S-93-639 (NEMA WC 74) 5 to 46 kV - Shielded Power Cable
- AEIC CS-8 - Qualification Testing Requirements

Flame Test Ratings

- FT1 - Flame Test - (1,706 BTU/Hr. nominal - Vertical Wire Flame Test)
- FT4, Flame Test - (70,000 BTU/Hr. - Vertical Tray Flame Test)
- IEEE 1202 - Flame Test - (70,000 BTU/Hr. - Vertical Tray Test)
- IEEE 383 - Flame Test - (70,000 BTU/Hr.)
- ICEA T-29-520 - Vertical Cable Tray Flame Test - (210,000 BTU/Hr)

Product Ratings

- CSA C22.2 No. 2556 & No. 0.3 - Wire and Cable Test Methods
- CSA LTGG [-40°C] - as per C68.10 - for Cold Bend and Impact rating
- CSA HL - for Hazardous Locations rating
- CSA FT4 - for Flame Retardancy rating
- CSA SUN RES - for Sunlight Resistant rating

Operating Temperatures

- -40°C - CSA Cold Bend and Impact Temperature
- -25°C - Min. Installation Temperature
- 105°C - Max Continuous Operating Temperature
- 140°C for Emergency Overload Temperature
- 250°C for Short Circuit Temperature

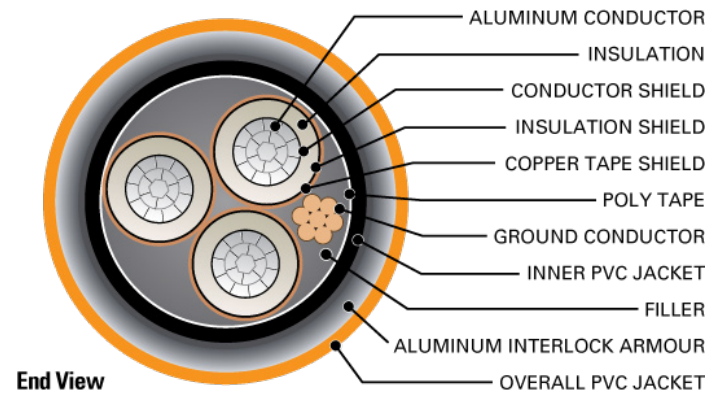


TABLE 2 - ENGINEERING SPECIFICATIONS

HVTECK Product Code	Maximum Pulling Tension		DC Resistance @ 25°C R _{DC}		AC Resistance @ 90°C 60 Hz (triplex formation) R _{AC}		Inductance L		Capacitance C		Inductive Reactance @ 60Hz (triplexed) X _L		Capacitive Reactance @ 60Hz (triplexed) X _C		Positive - Sequence Impedance*	Zero - Sequence Impedance*	Short Circuit Current (each phase conductor) @ 60Hz	Allowable Ampacities in Ventilated Cable Tray †	Allowable Ampacities Directly Buried in Earth ‡
	lb	Newtons	Ω / 1000 ft.	Ω / km	Ω / 1000 ft.	Ω / km	mH / 1000 ft.	mH / km	μF / 1000 ft.	μF / km	Ω / 1000 ft.	Ω / km	MΩ · 1000ft	MΩ · km					
AL90C95-002	1194	5313	0.265	0.869	0.333	1.093	0.0928	0.3046	0.2210	0.0350	0.1148	0.0394	0.0120	0.333 + j0.039	0.698 + j0.543	3.1	135	157	
AL90C95-001	1506	6701	0.211	0.692	0.265	0.870	0.0900	0.2953	0.2404	0.0339	0.1113	0.0362	0.0110	0.265 + j0.038	0.634 + j0.524	3.9	154	178	
AL90C95-010	1901	8455	0.168	0.551	0.211	0.693	0.0872	0.2860	0.2634	0.0329	0.1078	0.0330	0.0101	0.211 + j0.037	0.583 + j0.502	5.0	176	202	
AL90C95-020	2396	10657	0.133	0.436	0.167	0.549	0.0846	0.2776	0.2882	0.0319	0.1047	0.0302	0.0092	0.168 + j0.035	0.541 + j0.480	6.3	204	229	
AL90C95-030	3020	13435	0.105	0.345	0.132	0.433	0.0821	0.2695	0.3173	0.0310	0.1016	0.0274	0.0084	0.132 + j0.034	0.508 + j0.455	7.9	234	260	
AL90C95-040	3809	16942	0.084	0.274	0.105	0.345	0.0799	0.2621	0.3493	0.0301	0.0988	0.0249	0.0076	0.106 + j0.033	0.481 + j0.430	9.9	268	294	
AL90C95-250	4500	20017	0.071	0.232	0.089	0.292	0.0791	0.2595	0.1105	0.0298	0.0978	0.0240	0.0073	0.089 + j0.033	0.464 + j0.405	11.8	296	323	
AL90C95-350	6300	28024	0.051	0.166	0.064	0.210	0.0762	0.2500	0.1276	0.0287	0.0942	0.0208	0.0063	0.064 + j0.031	0.435 + j0.365	16.5	363	386	
AL90C95-500	9000	40034	0.035	0.116	0.045	0.148	0.0735	0.2412	0.1490	0.0277	0.0909	0.0178	0.0054	0.045 + j0.030	0.408 + j0.322	23.5	447	465	
AL90C95-750	13500	60051	0.024	0.077	0.031	0.100	0.0713	0.2340	0.1726	0.0269	0.0882	0.0154	0.0047	0.031 + j0.029	0.377 + j0.269	35.3	566	563	

* Calculations are based on 5 mil 25% over lapping copper tape shield / Conductor temperature of 90°C / Shield temperature of 45°C / Earth resistivity of 100 ohms-meter

† Ampacities are based on Table D17N of the 2015 Canadian Electrical Code Part I (40°C Ambient Air Temperature, indoor installation)

‡ Ampacities are based on Table D17E of the 2015 Canadian Electrical Code Part I