

# "E" Bracket

## Construction

The Angle "E" Bracket is manufactured from hot rolled steel structural channel shapes that are cold formed and welded to the proper shape and are braced to provide maximum strength. The bracket is galvanized to provide corrosion resistance.

## Features


- Manufactured from high-strength structural steel
- Corrosion resistant
- Maintains proper Covered Aerial MV cable orientation
- Drilled for use on standard utility poles

## Application

The "E" Bracket is designed to support a single circuit Covered Aerial MV system as it turns through an angle of greater than 6 degrees but not more than 60 degrees. The bracket will maintain the orientation of the Covered Aerial MV system through the turn so that the spacers before and after the turn are not overly stressed. The bracket will hold a variety of pin insulators and is compatible and interchangeable with other manufacturers' components. In addition, the bracket is specifically designed for the attachment of a Messenger Angle Clamp that will support the messenger of the system.

## Specification

ASTM 153

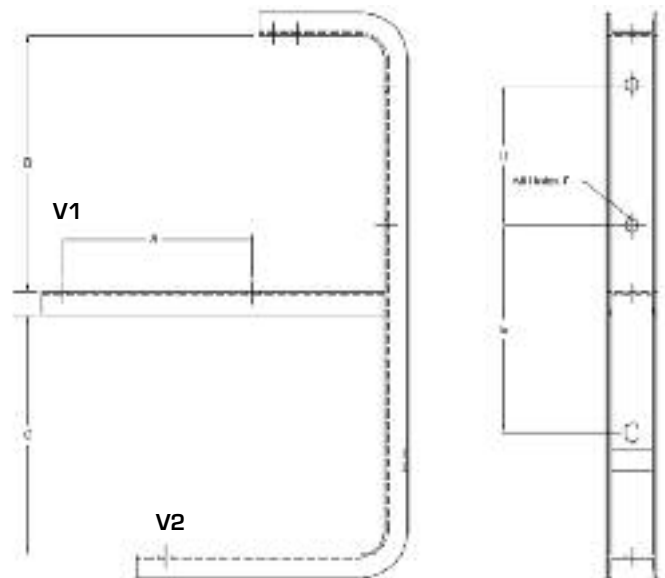

Southwire Stock #	Description	Hendrix Cat. No.	Dimensions (in)					
			A	B	C	D	E	F
64999701	Angle Bracket, E Style for 15kV	BA4-15	11.5	15.5	14.5	8.5	12.5	13/16

Southwire Stock #	Min. Yield Strength (lbs)		Weight (lbs)
	V1	V2	
64999701	800	1000	26.0