


TelcoFlex®-G L5 Telecom Grounding Cable

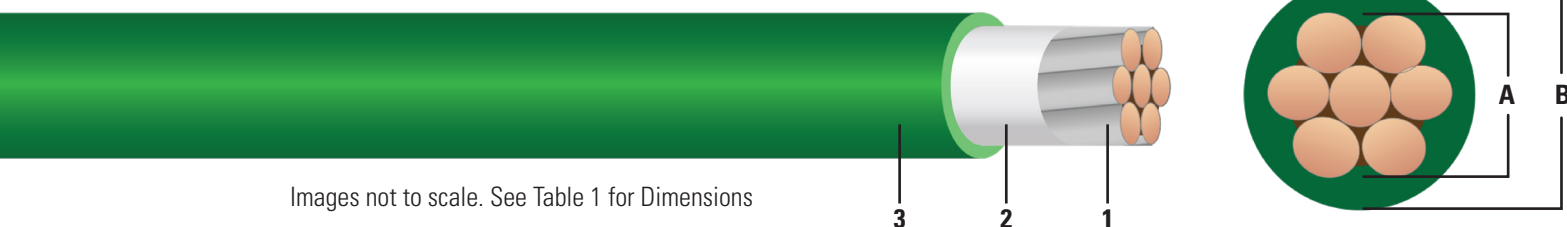

CONSTRUCTION:

- Conductors:** Class B tinned copper
- Separator:** Mylar tape
- Insulation:** Green thermoset insulation, 90°C wet or dry continuous operating temperature, 130°C emergency, 250°C short circuit

APPLICATIONS AND FEATURES:

- Suitable for Grounding
- Suitable for use in conduit and underground duct
- Suitable for DC and AC
- Sunlight and oil resistant
- Maximum side wall pressure 500 Lbs./Ft.
- RoHS/REACH Compliant

SPECIFICATIONS:

- ASTM B3 Soft or annealed copper
- ASTM B8 Concentric-lay stranded copper conductors
- ASTM B33 Tin coated copper conductors
- ICEA S-95-658 NEMA WC-70
- UL 44 Thermoset Insulated Wires and Cables

SAMPLE PRINT LEGEND:

SOUTHWIRE AIW™ CORD BRAND TELCOFLEX®-G V LEAD-FREE RoHS L5 (UL) E30117 SIZE AWG 600 VOLTS XHHW-2 SUNLIGHT RESISTANT GASOLINE AND OIL RESISTANT II SUITABLE FOR GROUNDING USE (YEAR) (TIME JULIAN DATE)

NOTE: CABLE SHALL BE PRINTED ON BOTH SIDES USING INK OF CONTRASTING COLOR; SEQUENTIAL FOOTAGE MARKS SHALL BE APPLIED AT 2 FOOT INTERVALS ON ONE SIDE OF THE CABLE.

TABLE 1 – PHYSICAL AND ELECTRICAL DATA

STOCK CODE	CONDUCTOR SIZE AWG OR KCMIL	STRANDING CLASS B NO. OF STRANDS	DIAMETER OVER CONDUCTOR (A) INCHES	INSULATION THICKNESS MILS	APPROXIMATE OD (B) INCHES	NOMINAL WEIGHT LBS/1000 FT.	AMPACITY FOR 600V NEC TABLE 310.15 (B) (16)+	
							75°C	90°C
64366301	10	7	0.113	30	0.173	29	35	40
TBD	8	7	0.142	45	0.232	61	50	55
64396101	6	7	0.178	45	0.268	99	65	75
TBD	4	7	0.225	45	0.315	146	85	95
64396201	2	7	0.283	45	0.373	238	115	130
TBD	1	19	0.322	55	0.432	290	130	145

+ Ampacity based on 310.15 (B) (16) allowable ampacities for not more than three current carrying conductors rated up to 2000 volts based on ambient temperature of 30 °C (86 °F).

All measurements are subject to nominal manufacturing tolerances.



Southwire Company, LLC | One Southwire Drive, Carrollton, GA 30119 | www.southwire.com

Copyright © 2019 Southwire Company, LLC. All Rights Reserved

