

Construction


The U-Bolt is manufactured from drop forged steel and is hot dipped galvanized for excellent corrosion resistance. The U-Bolt incorporates a standard 1" opening with overall hole spacing of 1 1/2" for the bracket.

Features

- Excellent corrosion resistance
- 1 1/2" hole spacing
- 4 1/2" total length
- Includes mounting nuts and washers

Application

The U-Bolt is used to attach the messenger angle clamp to the appropriate bracket for applications where the messenger cable is angled in toward the pole.

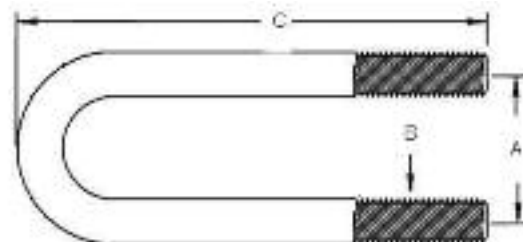

Southwire Stock #	Description	Hendrix Cat #	Dimensions (in)			Weight (lbs)
			A	B	C	
64999301	U-Bolt	UB	1.5	9/16-12 UNC	4.25	1.0